BODY OPTIONS

JFB Body Series

- 140% More Storage Capacity
- Independently Rubber Shock Mounted
- Aluminum Roll-Up Doors with Painted or Brushed Finish
- LED Interior Compartment & DOT Lighting
- 26 Additional LED Side Marker Lights
- 4 Additional Amber Side Strobes
- Anti-Slip Top Surfaces with LED Lighted Steps & Grab Handles
- Wide Variety of Tool Management Systems
- Incident Management Equipment Kits & Storage Solutions
- 264 in. C.T.

Composite Over Aluminum Body

- Independently Rubber Shock Mounted
- Panel Doors with Stainless Steel Latches & Hinges
- Built-In Storage & Chain Racks
- Interior Compartment Lighting
- LED DOT Lighting



STANDARD FEATURES

- 3-Section High-Strength Hydraulic Boom
- Max Lifting Capacity:

Boom Angle	Retracted	Extended
60°	120,000 lb.	35,500 lb.
30°	100,000 lb.	20,000 lb.
0°	57,600 lb.	17.000 lb.

- Max Boom Extension: 41' 5"
- Max Working Height: 42' 8" (Ground to Hook)
- Wrecker Boom Winches
- Dual Planetary 50,000 lb. Capacity
- $^{3}\!\!/_{\!4}$ in. x 250 ft. Wire Rope w/ 360° Swivel Hooks
- Air Cable Tensioners & Free Spool
- Boom Angle Indicators
- Boom Rotation: 360° Continuous
- Air Actuated Slew Lock (Front & Rear)
- High-Performance Polymer Slide Pads
- Boom Mounted D-Rings
- Driver & Passenger Side Proportional Controls
- Driver & Passenger Side Hyd. Pressure Gauges
- · Wireless Remote Proportional Control (All Boom Functions)
- 3-Location Multiplex Electrical Controls
- 2-Location Multiplex Air Controls
- High-Strength Steel "Torque Box" Sub-Frame
- · Low Profile Scissor-Style Outriggers with 15 in. Ground Penetration
- Driver & Passenger Side Outrigger Controls
- Outrigger Integrated Folding Spades
- Outrigger D-Rings with Manual Locking Pins
- Telescoping Rear Stabilizers with Integrated Folding Spades
- Recessed Glad Hand & 7-Pin Connectors
- LED Amber Main & Auxiliary Light Bars
- Upper & Lower Hook-Up Lights
- Upper Work Lights
- LED Wrecker Boom Work Light
- Underlift & Outrigger Lights
- 6 Side & 2 Rear Amber LED Strobes

ACCESSORIES

- 35,000 lb. Underlift Drag Winch
- Dual 20,000 lb. Auxiliary Boom Mounted Winches
- Miscellaneous Other Accessories Available
- · Back-up Camera

UNDERLIFT FEATURES

• Retracted Lift Capacity & Reach (Off Tailboard):

Model	Capacity	Reach
200	30,000 lb.	60 in.
250	35,000 lb.	54 in.
30	53,000 lb.	61 in.
65	56,500 lb.	76 in.

• Extended Lift Capacity & Reach (Off Tailboard):

Model	Capacity	Reach
300	16,000 lb.	152 in.
350	16,000 lb.	134 in.
530	17,000 lb.	146 in.
565	17,600 lb.	185 in.

• Max Towing Height & Negative Power Tilt:

odel	Tow Height	Neg. Tilt
0	42 in.	20°
0	43 in.	20°
0	42 in.	21°
5	42 in.	21°

- 3-Section High-Strength Hydraulic Boom
- 14,000 lb. or 25,000 lb. Tire Lift Option
- HD Tie-Down Straps, Chain Hook Adapters, Forks & Spring Lift Brackets Included
- 70° Side Pivoting Low Profile Cross Bar with 5" Pin

2014 Rotator

• Underlift Camera

THE 50/60 TON HEAVY-DUTY ROTATOR








jerrdan.com | 800.926.9666

An Oshkosh Corporation Company. The Jerr-Dan name and Jerr-Dan logo are registered trademarks of Oshkosh Corporation, ©2014 Jerr-Dan Corporation.

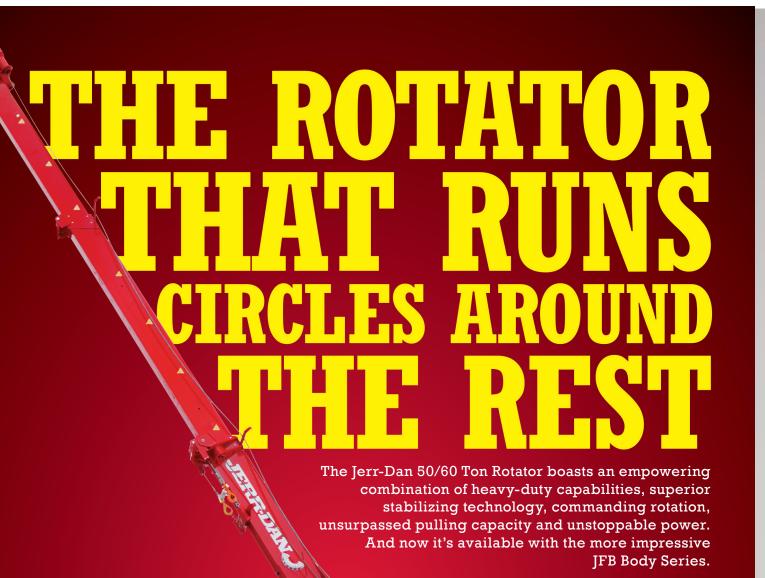



THE 50/60 TON HEAVY-DUTY ROTATOR

THE JFB BODY SERIES WORKS HARDER AND LASTS LONGER



ENGINEERED FOR INCIDENT MANAGEMENT Its extra-rugged, non-corrosive exterior is made of weather-tight, impact-resistant polypropylene—making it more durable and longer lasting. It features roll-up aluminum doors for swifter access to equipment, strategically placed LED lighting for improved visibility and specialty storage solutions to ensure every tool has its place.



FIRE EXTINGUISHER &





TILT-DOWN DRAWER, CHAIN CAROUSEL, CHAIN BINDER & STAY-DRY STORAGE



TILT-DOWN DRAWERS, TIRE LIFT, TRAFFIC CONES, CRIBBING, RATCHET, BROOM & SHOVEL STORAGE



STORAGE & CHARGING STATION





WITH LOCKING DRAWERS

LIGHTED STEPS & GRAB HANDLES



3-STAGE WRECKER BOOM



SCISSOR-STYLE



PASSENGER

SIDE CONTROL

PANELS

35K DRAG WINCH (OPTION)



20K AUX. WINCHES (OPTION)



WRECKER BOOM & UNDERLIFT REMOTE CONTROLS

A ROTATOR WITH REAL MUSCLE

SHACKLE

STORAGE

Jerr-Dan Heavy-Duty Rotators are built to handle the jobs other trucks can't touch. Its exclusive scissor-style outrigger system provides maximum stability for a working radius that leads the industry at nearly 42 feet. That means you can get into position easier and recover vehicles in even the most challenging conditions. The world's highest quality steel gives the rotator boom and torsion box subframe superior strength for handling the most demanding jobs efficiently and reliably.

FORK STORAGE

STORAGE

SHELVES